




6PF-8 6-1/2" PAPER CONE FOAM SURROUND WOOFER


MECHANICAL DRAWING

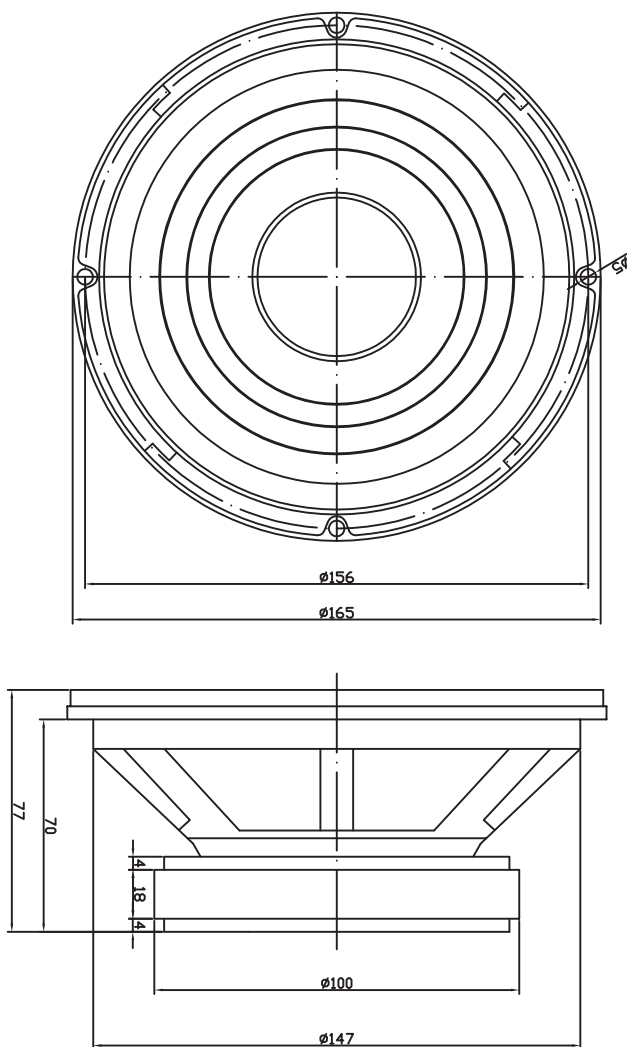

FEATURES

- Perfect for use in sealed-box designs
- Poly-laminated paper cone, treated foam surround, and polymer dust cap
- Smooth frequency response with minimal cone breakup
- Great replacement speaker


IMPEDANCE/PHASE

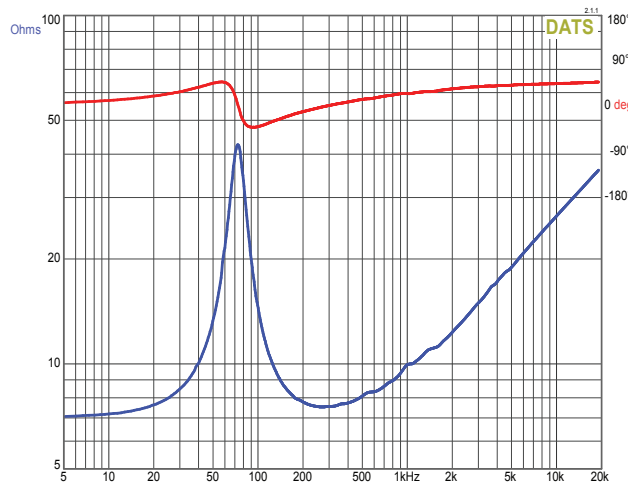

PARAMETERS

Impedance	8 ohms
Re	7.1 ohms
Le	1.1 mH
Fs	73 Hz
Qms	4.77
Qes	0.95
Qts	0.79
Mms	12.3 g
Cms	0.38 mm/N
Sd	140.3 cm ²
Vd	42 cm ³
BL	6.5 Tm
Vas	10.7 liters
Xmax	3 mm
VC Diameter	38 mm
SPL	89 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	90 watts
Usable Frequency Range (Hz)	70 - 8,000 Hz

FREQUENCY RESPONSE

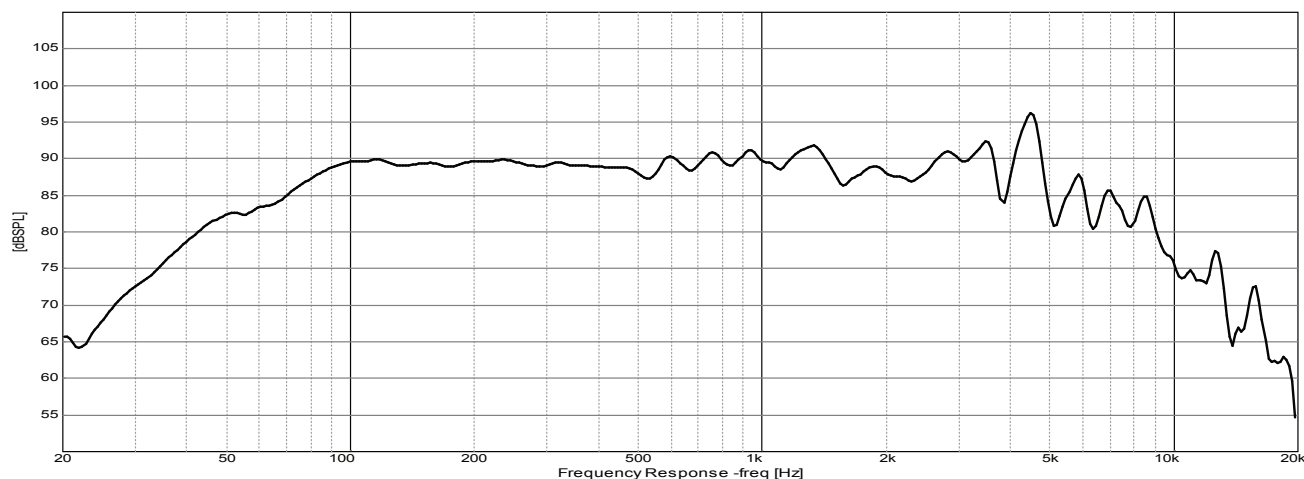

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.